

CDSUW-C Series

CDSUW-C Series



60 Hz Models Only

Features

- Sealed, constructed of 16 gauge cold rolled steel
- All non-conductive surfaces protected with suitable painting or electroplating
- Removable input cover for terminal access and field wiring connection
- Threaded conduit fitting with flexible lead on the load side
- Knockouts provided on the input side
- Discharge bleeder resistor provided to reduce shock hazard
- Surge protector provided upon request

Electrical Characteristics

Voltage Drop:

Less than 1% @ unity power factor

Overload:

140% of rated current for 15 minutes

Harmonic Distortion:

Less than 2% @ full rated current

Dielectric Withstanding Voltage:

Per MIL-PRF-15733 and UL1283

D.C. Insulation Resistance:

Per MIL-STD-202, Method 302

Terminal Strength:

Per MIL-STD-202, Method 211, Condition E

Temperature Rise:

Per MIL-PRF-15733 and UL1283

R.F. Radiation:

100 dB minimum shielding effectiveness

Insertion Loss:


100 dB from 14 kHz - 10 GHz per MIL-STD-220A, under load condition

Applicable Publications:

- MIL-PRF-15733** — Filters, radio interference
- MIL-STD-202** — Test methods for Components
- MIL-STD-220A** — Test method of Insertion Loss
- MIL-STD-285** — Test method for Shielding Effectiveness
- NFPA 70-1987** — National Electric Code
- 486A - 1983** — Wire Connectors and Lug
- UL1283** — UL standard for EMI Filters



How to Order:

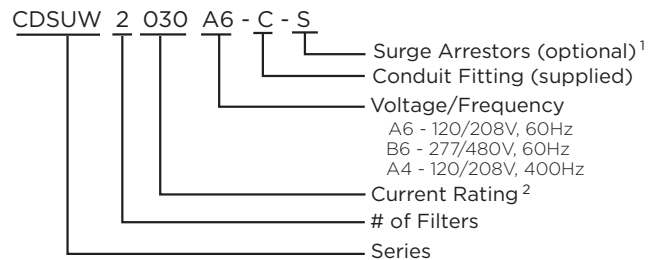


Examples: CDSUW2030A6-C-S, CDSUW1010B6-C

Note 1: Surge Arrestor for A6/A4* Models: V251BA60
Surge Arrestor for B6 Models: V481BA60

Note 2: Current configuration listed as 3 digits with leading zeros

CDSUW-C Series (continued)

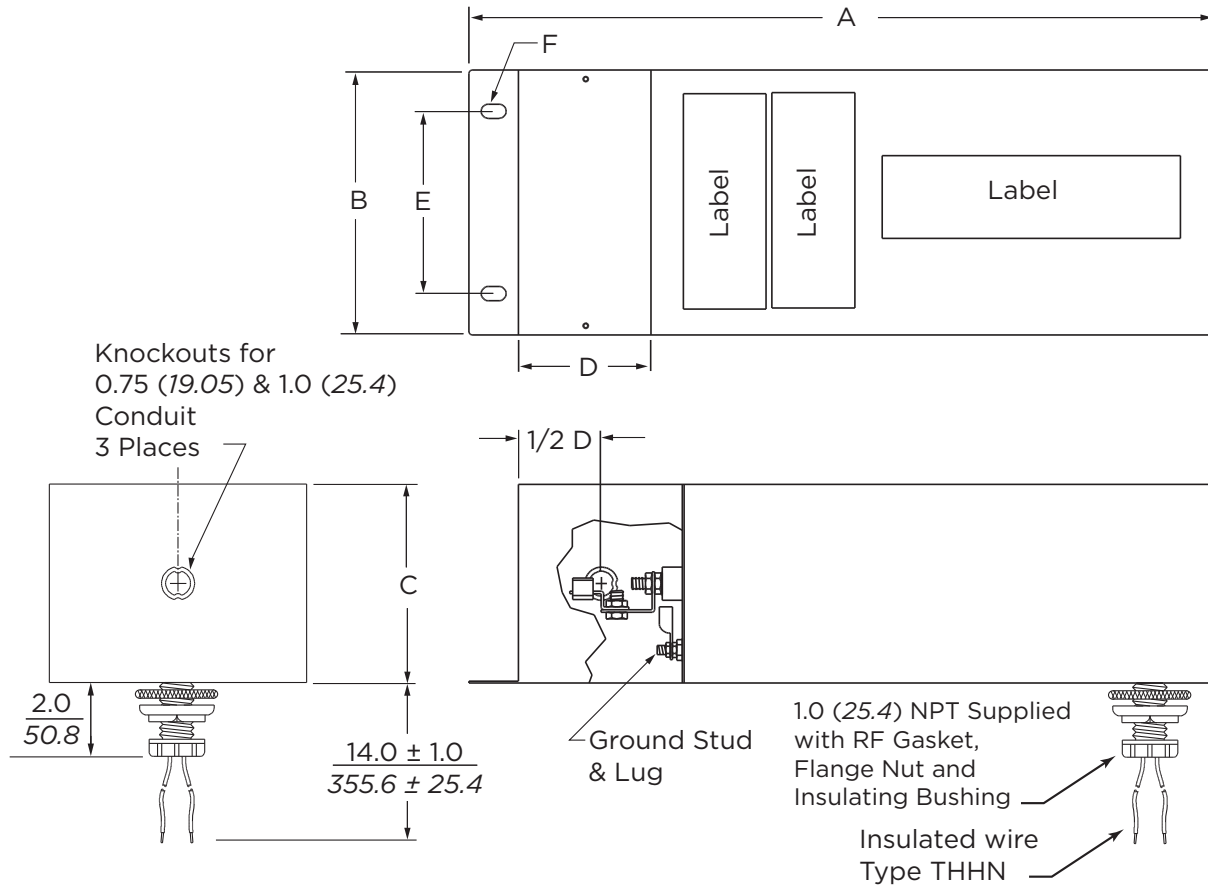

CDSUW	Rated Current	Dimensions						Wire Gauge (AWG/mm ²)	Approx. Weight (Pounds/KG)
		A ±.063 [1.6]	B ±.063 [1.6]	C ±.063 [1.6]	D	E	F		
1010**-C	10A	21.0 533.4	4.0 101.6	5.0 127.0	5.0 127.0	3.0 76.2	.31 x .50 7.87 x 12.7	10 5.26	15 6.80
2010**-C	2 @ 10A	21.0 533.4	8.0 203.2	5.0 127.0	5.0 127.0	5.5 139.7	.43 x .75 10.9 x 19.1	10 5.26	30 13.6
1030**-C	30A	26.0 660.4	6.0 152.4	6.0 152.4	5.0 127.0	4.0 101.6	.31 x .50 7.87 x 12.7	6 13.20	30 13.6
2030**-C	2 @ 30A	26.0 660.4	12.0 304.8	6.0 152.4	5.0 127.0	9.0 228.6	.43 x .75 10.9 x 19.1	6 13.20	60 27.2
1060**-C	60A	32.0 812.8	8.0 203.2	6.0 152.4	6.0 152.4	5.5 139.7	.43 x .75 10.9 x 19.1	6 13.20	60 27.2
1100**-C	100A	34.0 863.6	8.0 203.2	6.0 152.4	8.0 203.2	5.5 139.7	.43 x .75 10.9 x 19.1	2 33.6	70 31.8
1150**-C	150A	41.0 1041.4	10.0 254.0	6.0 152.4	9.0 228.6	9.0 228.6	.43 x .75 10.9 x 19.1	0 53.5	90 40.8
1225**-C	225A	41.0 1041.4	10.0 254.0	6.0 152.4	9.0 228.6	9.0 228.6	.43 x .75 10.9 x 19.1	250 MCM 126.0	120 54.4

*400Hz filters available upon request. Will require external power factor correction coil. Please contact TE Connectivity Application Engineering 847-573-6517.

Max. Operating Voltage	
A6:	120/208V, 60 Hz
B6:	277/480V, 60 Hz
A4*:	120/208V, 400 Hz